


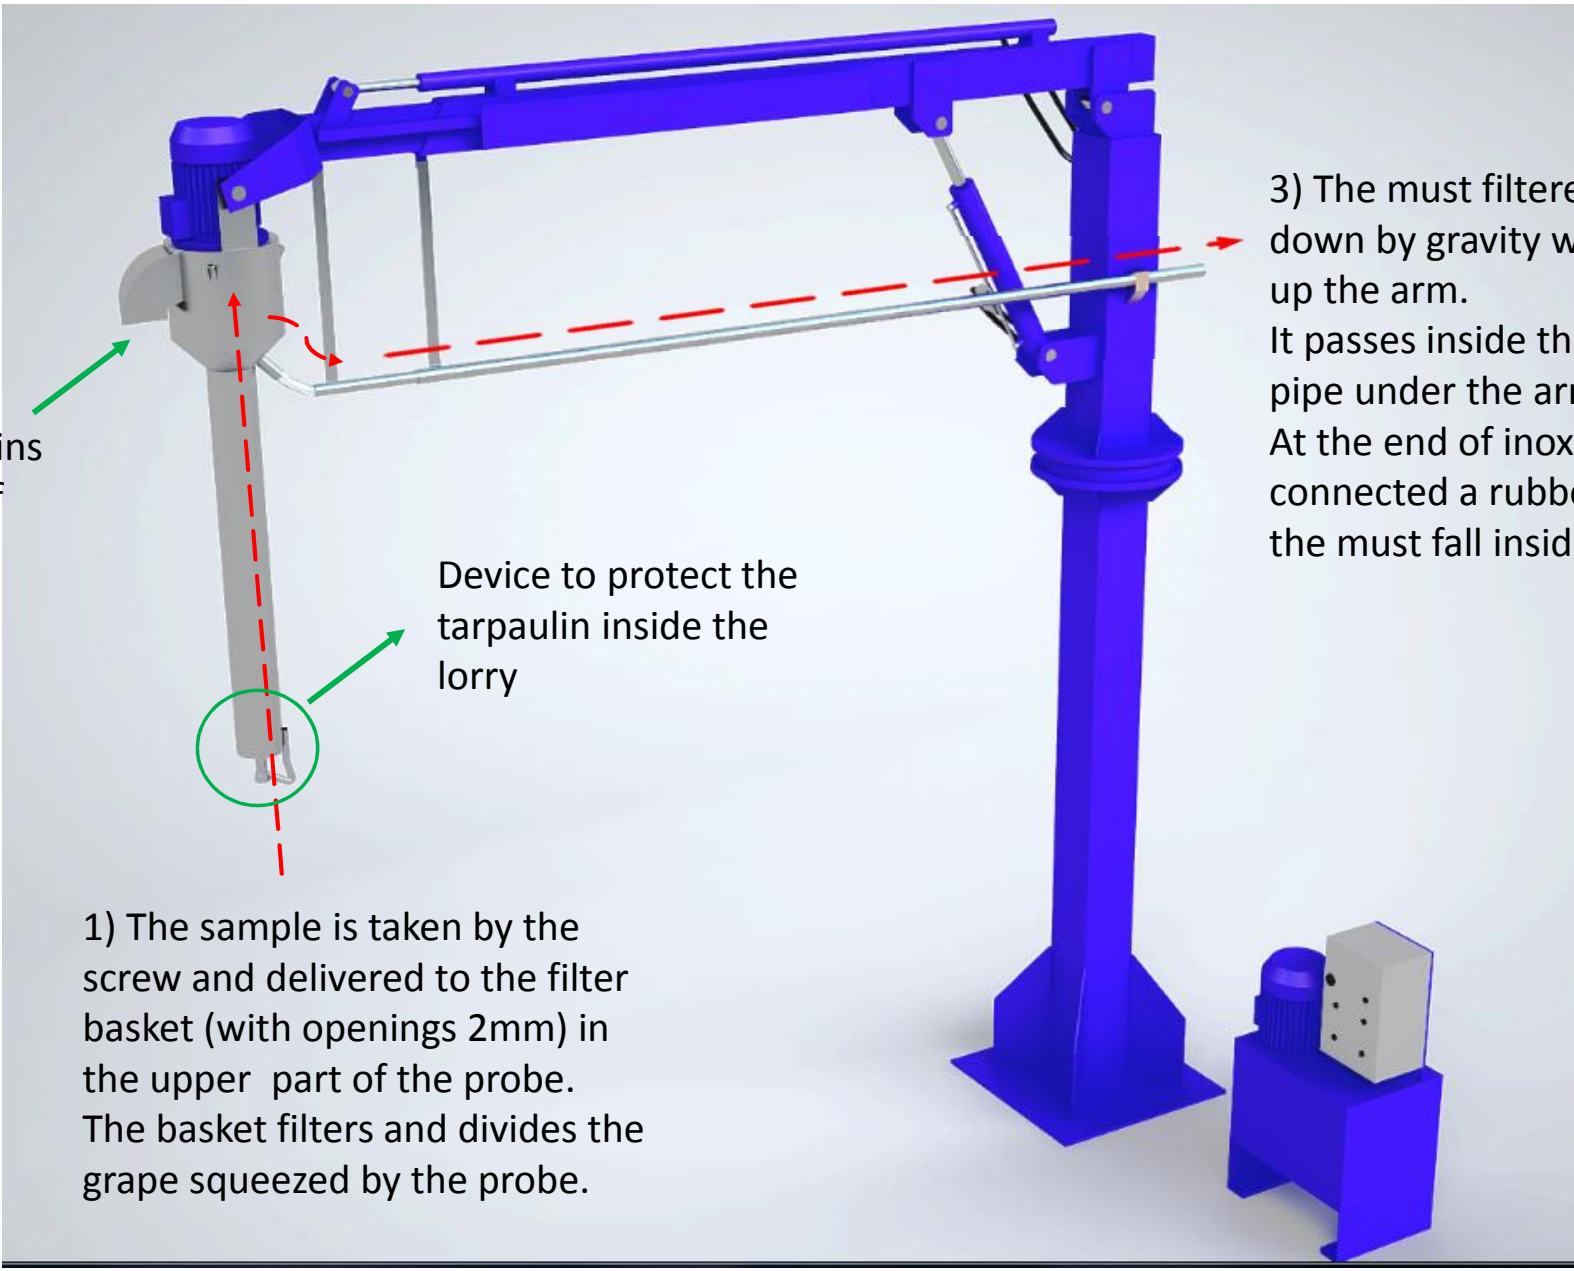

2) From here skins and branches of grapes are discharged

Device to protect the tarpaulin inside the lorry

1) The sample is taken by the screw and delivered to the filter basket (with openings 2mm) in the upper part of the probe. The basket filters and divides the grape squeezed by the probe.

3) The must filtered by basket fall down by gravity when you raise up the arm. It passes inside the inox steel pipe under the arm. At the end of inox pipe ususally is connected a rubber hose to make the must fall inside the analyzer