



# STORK COMPACT ALL HYDRAULIC

## TECHNICAL FEATURES

### POWER SUPPLY

400 VAC 3P + N + E 50 HZ

### AIR BLOWER

THREE PHASE 2,2 KW  
SIDE CHANNEL

HYDRAULIC UNIT 1,5 KW

SHIPPING WEIGHT 830 KG

MAX ROTATION 350°

4,4 mt  
MAX ARM  
LENGTH

350°  
MAX  
ROTATION

INOX  
INOX STEEL  
AISI 304 PROBE

4 mt  
MACHINE  
HEIGHT

## EU CERTIFICATIONS

UNI EN ISO 24333-2010 / UNI EN ISO 12100-1:2009

UNI EN ISO 13857 - 13850 / UNI EN 349-547-999-983

2006/42/CE / 2006/95/CEE / 20447108/CE



## INCLUDED



WIRELESS  
CONTROL



SUCTION TURBINE  
2,2 KW



## OPTIONAL



VIDEO CAMERA  
SYSTEM

## COMPACT

1

TELESCOPIC  
ARM

2

HIGH  
PENETRATION  
POWER, 8 NM

3

PRE ASSEMBLED  
EASY TO INSTALL

4

HOMOGENEOUS AND  
REPRESENTATIVE  
SAMPLE

5

ALL HYDRAULIC,  
MINIMUM  
MAINTENANCE

6

STRONG FRAME  
LONG TERM  
RESISTANCE

7


350° ROTATION  
DUAL LANE  
CAPABILITY

8


REACH THE BOTTOM  
OF THE TRAILER

DESIGNED FOR  
**9 MT**  
WHEIGHBRIDGES

## DIMENSIONS

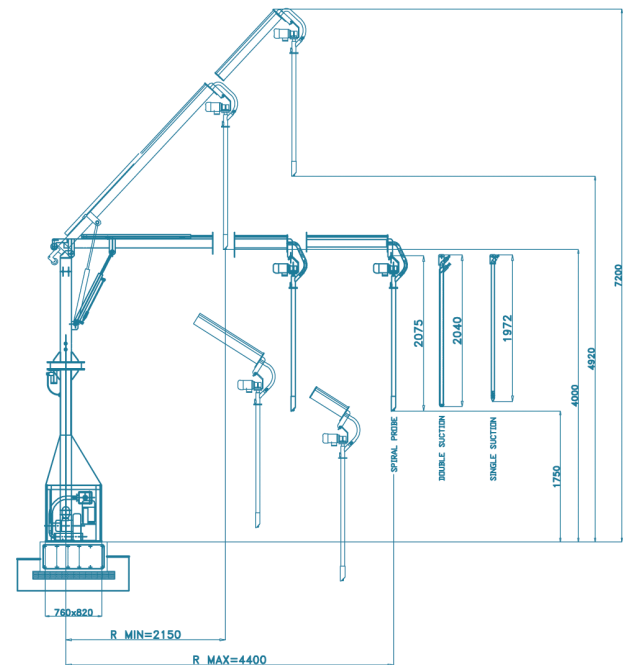

## SAMPLING AREA

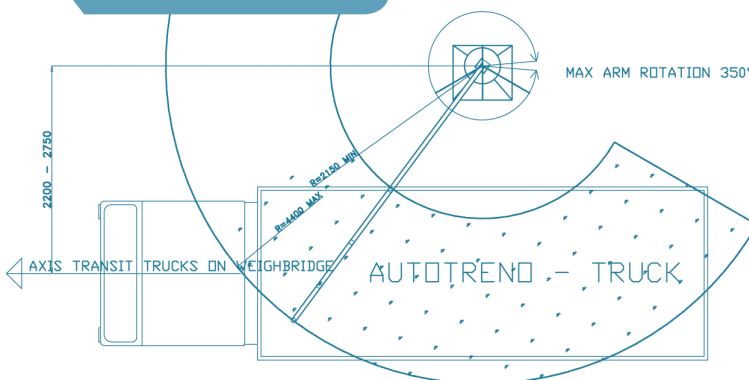

## PROBES SINGLE SUCTION

STANDARD


2000 MM

OPTIONAL

2500 MM

2700 MM

3000 MM



## PROBES DOUBLE SUCTION

STANDARD

2000 MM

OPTIONAL

2300 MM

2500 MM

2700 MM



## PROBES AUGER

STANDARD

2000 MM

OPTIONAL

2300 MM

2500 MM

